

SAMPLE COOLERS

**LARGEST SELECTION OF MODELS
OFFERED BY ANY MANUFACTURER**

WATER • STEAM • PROCESS

**Backed By
Over 80 Years of
Sampling Experience**

www.sentry-equip.com

COOL, HEAT OR CONDENSE ANY SAMPLE

Sentry has more types of sample coolers than any other manufacturer. Flows from 0.25 Gal/Hr (1 L/Hr) to 100 Gal/Min (378 LPM) and pressure/temperature ratings up to 5,000 psi (345 bar) and up to 1100°F (593°C) are available using single tube Helical Coil, multi-tube Spiral Tube or Tube-in-Tube heat exchanger designs.

With over 80 years of heat transfer experience, Sentry has the manufacturing know-how and

engineering expertise to solve even the most complex sample conditioning problem. Special flow configurations, end connections, and exotic materials are our specialties.

A variety of international certifications are available for most of our sample cooler products including ASME and CRN.



Note: Sentry sample coolers are exempt from CE marking per Pressure Equipment Directive 97/23/EC. Vessels are below or equal to the limits set forth in Article 3, Sections 1.1, 1.2, 1.3, and section 2 as applicable, and are designed and manufactured in accordance with sound engineering practice. Specifically, the vessel meets the general requirements of the ASME Section VIII, Division 1 Boiler And Pressure Vessel Code. The nameplate will bear the name of Sentry Equipment Corp and safety instructions will be included per Article 3, Section 3.

HELICAL COIL



- Flow rates to 1.5 GPM (5.7 LPM)
- Sample conditions up to 5000 psi (345 bar) and up to 1100°F (593°C)
- Single continuous tube
- High efficiency
- Compact design
- Code stamp
- 316 SS, Inconel® 625, Hastelloy®, titanium and other exotic materials

The Helical Coil product line includes the most compact and high efficiency sample coolers. A single continuous tube in varying diameters and lengths is helically coiled and fitted in a shell. A variety of materials are available to suit most fluids and gases.

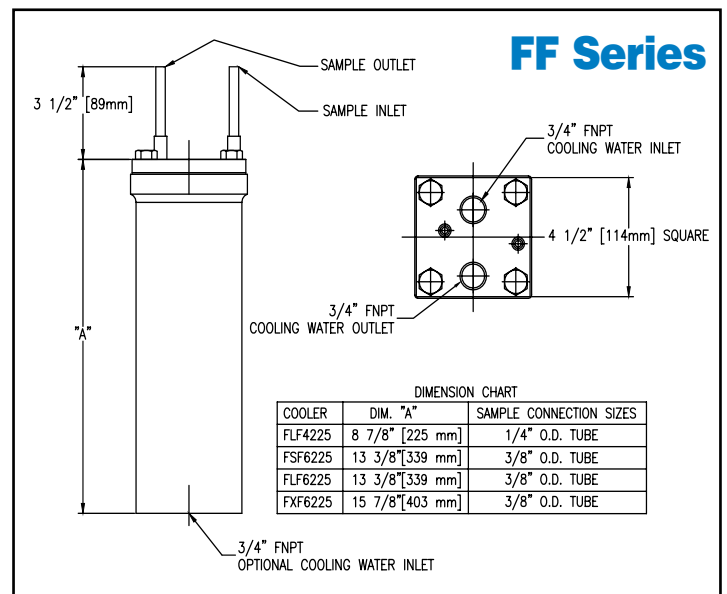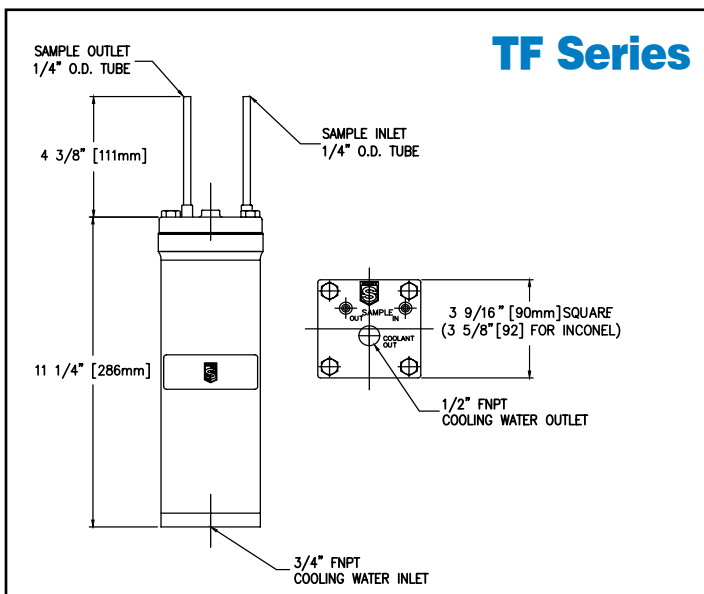

The TF and FF series are the most popular sample coolers since they provide maximum surface area in a compact space, lowering both acquisition and installation costs. Shells on these coolers are removable and are manufactured from stainless steel as a standard.

HELICAL COIL SAMPLE COOLERS

Specifications – TF Series

Model No.	Shell Design	Tube Design	Tube Material	Shell Material	Area	Shipping Weight	Part Number
TSF-4225	450 psi @ 650°F 31 bar @ 345°C	5000 psi @ 1000°F 345 bar @ 540°C	1/4" O.D. 316 SS	304 SS	1.2 ft ² 0.11 m ²	11 lbs 5 kg	7-00687A
TSF-42B5	450 psi @ 650°F 31 bar @ 345°C	5000 psi @ 1100°F 345 bar @ 593°C	1/4" O.D. Inconel® 625	304 SS	1.2 ft ² 0.11 m ²	11 lbs 5 kg	7-00687H
TSF-44B5	150 psi @ 250°F 10 bar @ 121°C	5000 psi @ 1100°F 345 bar @ 593°C	1/4" O.D. Inconel® 625	Cupronickel/ Monel®	1.2 ft ² 0.11 m ²	11 lbs 5 kg	7-00693F
Reference Bulletin 4.2 for complete TSF technical specifications.							
TLF-4225	450 psi @ 650°F 31 bar @ 345°C	5000 psi @ 1000°F 345 bar @ 540°C	1/4" O.D. 316 SS	304 SS	2.4 ft ² 0.22 m ²	14 lbs 6.5 kg	7-00686A
TLF-42B5	450 psi @ 650°F 31 bar @ 345°C	5000 psi @ 1100°F 345 bar @ 593°C	1/4" O.D. Inconel® 625	304 SS	2.4 ft ² 0.22 m ²	14 lbs 6.5 kg	7-00686L
TLF-44B5	150 psi @ 250°F 10 bar @ 121°C	5000 psi @ 1100°F 345 bar @ 593°C	1/4" O.D. Inconel® 625	Cupronickel/ Monel®	2.4 ft ² 0.22 m ²	14 lbs 6.5 kg	7-00693E
Reference Bulletin 4.3 for complete TLF technical specifications.							

Specifications – FF Series


Model No.	Shell Design	Tube Design	Tube Material	Shell Material	Area	Shipping Weight	Part Number
FSF-6225	450 psi @ 650°F 31 bar @ 345°C	5000 psi @ 1000°F 345 bar @ 540°C	3/8" O.D. 316 SS	304 SS	1.7 ft ² 0.16 m ²	19 lbs 8.5 kg	7-00757C
FSF-62B3	450 psi @ 650°F 31 bar @ 345°C	3400 psi @ 1100°F 284 bar @ 593°C	3/8" O.D. Inconel® 625	304 SS	1.7 ft ² 0.16 m ²	19 lbs 8.5 kg	7-00632H
FSF-64B3	150 psi @ 250°F 10 bar @ 121°C	3400 psi @ 1100°F 284 bar @ 593°C	3/8" O.D. Inconel® 625	Cupronickel/ Monel®	1.7 ft ² 0.16 m ²	21 lbs 9.5 kg	7-00632J
Reference Bulletin 4.4 for complete FSF technical specifications.							
FLF-4225	450 psi @ 650°F 31 bar @ 345°C	5000 psi @ 1000°F 345 bar @ 540°C	1/4" O.D. 316 SS	304 SS	2.4 ft ² 0.22 m ²	17 lbs 7.5 kg	7-00759A
FLF-6222	450 psi @ 650°F 31 bar @ 345°C	2485 psi @ 680°F 171 bar @ 360°C	3/8" O.D. 316 SS	304 SS	3.5 ft ² 0.33 m ²	21 lbs 9.5 kg	7-00760A
FLF-6225	450 psi @ 650°F 31 bar @ 345°C	5000 psi @ 1000°F 345 bar @ 540°C	3/8" O.D. 316 SS	304 SS	3.5 ft ² 0.33 m ²	24 lbs 11 kg	7-00757A
FLF-62B3	450 psi @ 650°F 31 bar @ 345°C	3400 psi @ 1100°F 284 bar @ 593°C	3/8" O.D. Inconel® 625	304 SS	3.5 ft ² 0.33 m ²	24 lbs 11 kg	7-00632K
FLF-64B3	150 psi @ 250°F 10 bar @ 121°C	3400 psi @ 1100°F 284 bar @ 593°C	3/8" O.D. Inconel® 625	Cupronickel/ Monel®	3.5 ft ² 0.33 m ²	26 lbs 12 kg	7-00632M
Reference Bulletin 4.5 for complete FLF technical specifications.							
FXF-6223	450 psi @ 650°F 31 bar @ 345°C	2850 psi @ 1000°F 196 bar @ 540°C	3/8" O.D. 316 SS	304 SS	4.7 ft ² 0.44 m ²	25 lbs 11.5 kg	7-00757B
Reference Bulletin 4.6 for complete FXF technical specifications.							

Models listed are standard offerings. Consult referenced bulletins or factory for other materials and configurations.

HELICAL COIL *CONTINUED*

TRB Series

The TRB sample cooler is generally used in low pressure boiler applications where a small volume of sample is required.

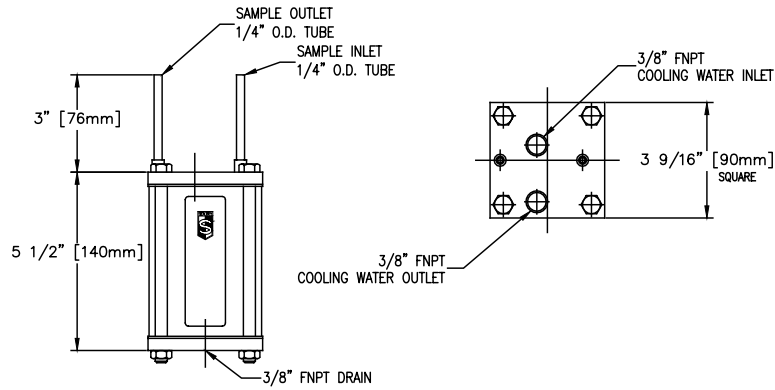

Specifications – TRB Series


Model No.	Shell Design	Tube Design	Tube Material	Shell Material	Area	Weight	Part Number
TRB-4222	250 psi @ 450°F 17 bar @ 232°C	2000 psi @ 635°F 140 bar @ 335°C	1/4" O.D. SS*	304 SS	1.2 ft ² 0.11m ²	9 lbs 4 kg	7-00016A

Reference Bulletin 4.1 for complete TRB technical specifications.

* Tubing is 300 series stainless steel with chemical and physical properties equal to or better than T304.

WSW Series

The WSW sample cooler is designed for high viscosity/ low pressure drop service and is useful in cooling slurries and very low pressure samples.

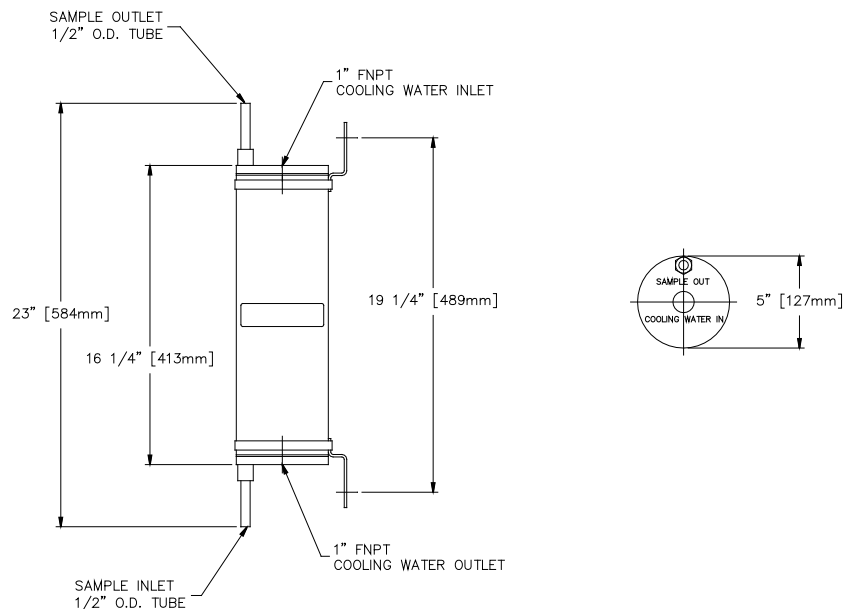

Specifications – WSW Series

Model No.	Shell Design	Tube Design	Tube Material	Shell Material	Area	Weight	Part Number
WSW-8222	150 psi @ 300°F 10 bar @ 150°C	1200 psi @ 650°F 85 bar @ 345°C	1/2" O.D. 316 SS	304 SS	2.5 ft ² 0.23 m ²	25 lbs 11.5 kg	7-00712A

Reference Bulletin 4.7 for complete WSW technical specifications.


SPIRAL TUBE

A spiral tube heat exchanger is a spirally coiled tube and manifold assembly fitted into a compact shell that optimizes heat transfer efficiency and space. The spiral shape of the coil and shell flow paths creates centrifugal force that enhances heat transfer on both sides in a true counterflow arrangement. By varying the number, diameter and length of the coiled tube, efficiency and footprint can be optimized versus traditional shell and tube designs.



- Flow rates to 100 GPM (378 LPM)
- Sample conditions up to 5000 psi (345 bar) and up to 1000°F (540°C)
- Optimal design for corrosive fluid/gases
- Vapor condensing/gas stripping capabilities
- High flow in a small footprint
- Highly resistant to thermal and hydraulic shock
- Bolted or all welded shell
- Numerous flow path and connection configurations
- Compact and lightweight, easy to install

Standard tube material: 316 SS. Optional materials include: 304 SS, Hastelloy,[®] Inconel,[®] cupronickel and other alloys. Standard shell material: Carbon Steel. Optional materials include 304 SS, 316 SS and Cupronickel. Standard shell side Pressure/Temperature Rating: 150 psi (10 bar) up to 400°F (204°C). Other ratings available.

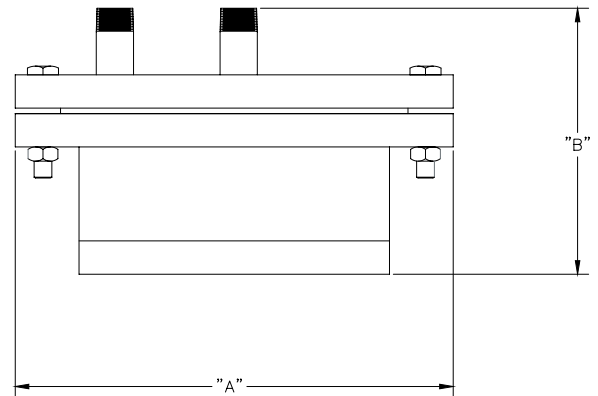

Specifications – Spiral Tube

Series*	Tube Configuration				H.T. Area	Dimensions	
	1/4"	3/8"	1/2"	3/4"		A	B
xSxACx	n				3 ft ² 0.3 m ²	10" 254 mm	5" 127 mm
xSxCCx	n	n			4–7 ft ² 0.4–0.7 m ²	14" 355 mm	7–10" 178–254 mm
xSxDCx	n	n			6–22 ft ² 0.6–2.1 m ²	17" 432 mm	7–13" 178–330 mm
xSxFCx		n	n		13–44 ft ² 1.21–4.09 m ²	20" 508 mm	11–22" 279–559 mm
xSxGCx		n	n	n	16–42 ft ² 1.5–3.9 m ²	23" 584 mm	14–26" 355–660 mm
xSxJCx			n	n	33–117 ft ² 3.1–10.9 m ²	27" 686 mm	15–30" 381–762 mm
xSxKCx			n	n	47–140 ft ² 4.3–13 m ²	29" 737 mm	15–30" 381–762 mm
xSxLCx			n	n	50–177 ft ² 4.6–16.4 m ²	31" 787 mm	15–30" 381–762 mm

Reference Bulletin 12.1.1 for complete Spiral Tube technical specifications.

* "x" denotes model-specific information. Consult factory for other configurations. One piece welded shell design available.


TUBE-IN-TUBE

Dual Tube Coil (DTC) products are helically wound, full counter flow heat exchangers—well-suited for a variety of applications where low flow rates of high pressure and/or temperature fluids need heating or cooling. A variety of inner and outer tube sizes are available to meet most application requirements.

- **Flow rates to 3 GPM (11.4 LPM)**
- **Sample conditions up to 6000 psi (414 bar) and up to 1100° F (593° C)**
- **Single continuous tube**
- **Fully drainable**
- **Highly resistant to thermal and hydraulic shock**
- **Sanitary model available**
- **Copper, 316 SS, Inconel® 625, Hastelloy®, titanium and other exotic materials**



SIZE	DIM "A"	DIM "B"	DIM "C"
DTC-4	5" [127mm]	13-1/8" [334mm]	18-3/8" [467mm]
DTC-6	8-1/2" [216mm]	13" [330mm]	21-1/2" [546mm]
DTC-8	8" [203mm]	16-1/2" [419mm]	22-3/4" [578mm]

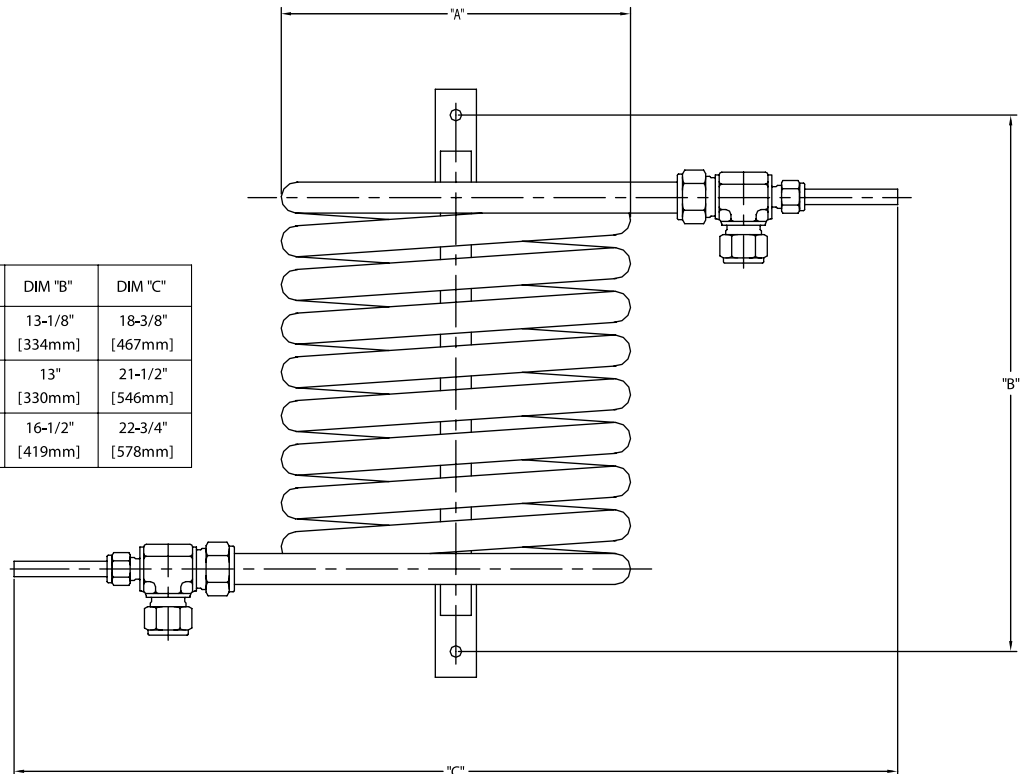

DTC Specifications – 4 Series

Model No.	Inner Tube Design	Outer Tube Design	Inner Tube Material	Outer Tube Material	H.T. Area	Weight	Part Number
DTC-CUA/CUA-4-1-1	2000 psig @ 300°F 137 bar @ 148°C	700 psig @ 300°F 48 bar @ 148°C	1/4" O.D. Copper	1/2" O.D. Copper	1.26 ft ² 0.12 m ²	12 lbs. 5.5 kg	7-02671A
DTC-SSA/CUA-4-1-1	4900 psig @ 1000°F 337 bar @ 537°C	700 psig @ 300°F 48 bar @ 148°C	1/4" O.D. 316 SS	1/2" O.D. Copper	1.26 ft ² 0.12 m ²	12 lbs. 5.5 kg	7-02671B
DTC-IN1/CUA-4-1-1	5450 psig @ 1100°F 375 bar @ 593°C	700 psig @ 300°F 48 bar @ 148°C	1/4" O.D. Inconel®	1/2" O.D. Copper	1.26 ft ² 0.12 m ²	12 lbs. 5.5 kg	7-02671C
DTC-SSA/SSB-4-1-1	4900 psig @ 1000°F 337 bar @ 537°C	2300 psig @ 1000°F 158 bar @ 537°C	1/4" O.D. 316 SS	1/2" O.D. 316 SS	1.26 ft ² 0.12 m ²	12 lbs. 5.5 kg	7-02671D
DTC-IN1/SSB-4-1-1	5450 psig @ 1100°F 375 bar @ 593°C	2300 psig @ 1000°F 158 bar @ 537°C	1/4" O.D. Inconel®	1/2" O.D. 316 SS	1.26 ft ² 0.12 m ²	12 lbs. 5.5 kg	7-02671E

DTC Specifications – 6 Series

Model No.	Inner Tube Design	Outer Tube Design	Inner Tube Material	Outer Tube Material	H.T. Area	Weight	Part Number
DTC-CUA/CUB-6-1-1	1250 psig @ 300°F 86 bar @ 148°C	700 psig @ 300°F 48 bar @ 148°C	3/8" O.D. Copper	3/4" O.D. Copper	1.90 ft ² 0.18 m ²	20 lbs. 9 kg	7-02672A
DTC-SSC/CUB-6-1-1	5100 psig @ 1000°F 351 bar @ 537°C	700 psig @ 300°F 48 bar @ 148°C	3/8" O.D. 316 SS	3/4" O.D. Copper	1.90 ft ² 0.18 m ²	20 lbs. 9 kg	7-02672B
DTC-IN1/CUB-6-1-1	3800 psig @ 1100°F 262 bar @ 593°C	700 psig @ 300°F 48 bar @ 148°C	3/8" O.D. Inconel®	3/4" O.D. Copper	1.90 ft ² 0.18 m ²	20 lbs. 9 kg	7-02672C
DTC-SSC/SSC-6-1-1	5100 psig @ 1000°F 351 bar @ 537°C	2300 psig @ 1000°F 158 bar @ 537°C	3/8" O.D. 316 SS	3/4" O.D. 316 SS	1.90 ft ² 0.18 m ²	20 lbs. 9 kg	7-02672D
DTC-IN1/SSC-6-1-1	3800 psig @ 1100°F 262 bar @ 593°C	2300 psig @ 1000°F 158 bar @ 537°C	3/8" O.D. Inconel®	3/4" O.D. 316 SS	1.90 ft ² 0.18 m ²	20 lbs. 9 kg	7-02672E

DTC Specifications – 8 Series

Model No.	Inner Tube Design	Outer Tube Design	Inner Tube Material	Outer Tube Material	H.T. Area	Weight	Part Number
DTC-CUB/CUC-8-1-1	1250 psig @ 300°F 86 bar @ 148°C	700 psig @ 300°F 48 bar @ 148°C	1/2" O.D. Copper	1" O.D. Copper	2.52 ft ² 0.23 m ²	30 lbs. 13.6 kg	7-02673A
DTC-SSC/CUC-8-1-1	2400 psig @ 1000°F 165 bar @ 537°C	700 psig @ 300°F 48 bar @ 148°C	1/2" O.D. 316 SS	1" O.D. Copper	2.52 ft ² 0.23 m ²	30 lbs. 13.6 kg	7-02673B
DTC-IN7/CUC-8-1-1	4000 psig @ 900°F 275 bar @ 482°C	700 psig @ 300°F 48 bar @ 148°C	1/2" O.D. Inconel®	1" O.D. Copper	2.52 ft ² 0.23 m ²	30 lbs. 13.6 kg	7-02673X
DTC-SSB/SSD-8-1-1	2400 psig @ 1000°F 165 bar @ 537°C	2300 psig @ 1000°F 158 bar @ 537°C	1/2" O.D. 316 SS	1" O.D. 316 SS	2.52 ft ² 0.23 m ²	30 lbs. 13.6 kg	7-02673D
DTC-IN7/SSD-8-1-1	4000 psig @ 900°F 276 bar @ 482°C	2300 psig @ 1000°F 158 bar @ 537°C	1/2" O.D. Inconel®	1" O.D. 316 SS	2.52 ft ² 0.23 m ²	30 lbs. 13.6 kg	7-02673Y

Reference Bulletin 17.1 for complete DTC technical specifications.

Models listed are standard offerings. Consult referenced bulletins or factory for other materials and configurations.

A SAMPLING OF SENTRY EQUIPMENT'S PRODUCTS



WATER/STEAM SAMPLING

- **Sample Coolers**
- **VREL[®] Pressure Reducers**
- **Back Pressure Regulator/Relief Valves**
- **Thermal Shut Off Valves**
- **Single Line Sample Panels**
- **Cation Resin Columns**
- **Degassed Conductivity Panels**
- **Corrosion Products Samplers**
- **Temperature Control Units**
- **Sample Sequencers**
- **Custom Sampling Systems**

PROCESS SAMPLING

Sampling Equipment for:

- **High vapor pressure gases/liquids**
- **High pressure gases**
- **Gas concentration measurement**
- **Liquids and slurries**
- **Bulk Solids**
- **For use in industries such as chemical, petroleum refining, cement, nuclear, mining, pharmaceutical, food and more**



WARNING

It is solely the responsibility of the end-user, through its own analysis and testing, to select products and materials suitable for their specific application requirements, ensure they are properly installed, safely applied, properly maintained, and limit their use to their intended purpose. Improper selection, installation, or use may result in personal injury or property damage.



SENTRY EQUIPMENT CORP

PO Box 127
Oconomowoc, WI 53066 USA
Phone: 262-567-7256
Fax: 262-567-4523

E-mail:
sales@sentry-equip.com

Website:
www.sentry-equip.com

For further information, contact: